


## トリミングプレス装置

This single unit enables removal of waste from multiple surfaces and from a number of different models.

### Structure

- The drive unit employs a servo link configuration to improve sealing and prevent ingress of dust and sand.
- Press torque control is achieved with a servomotor link to accommodate and permit control over a range of burr thicknesses.
- The blade indexing mechanism accommodates the top and bottom surfaces and a number of different models, and thus enables multiple press operations within the time cycle.
- The space-saving design ensures a compact configuration.

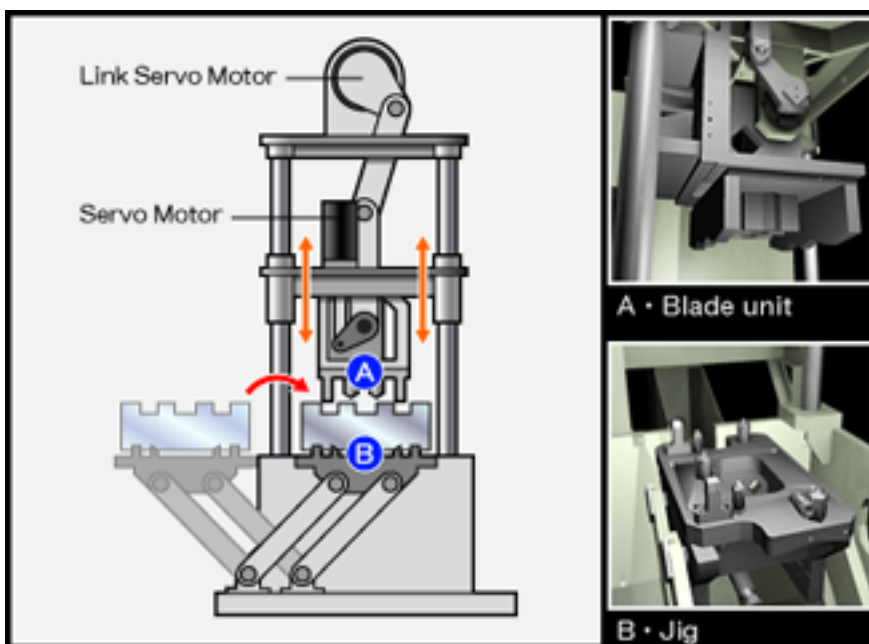

Drive unit	: Servo link raised and lowered
Jig unit	: retractable
Clamping unit	: Auto clamping
Control panel	: Space-saving design
Console	: General purpose console